



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



## UNIT IV

### EVIDENCE COLLECTION AND FORENSICS TOOLS

Processing Crime and Incident Scenes - Working with Windows and DOS Systems.

Current Computer Forensics Tools: Software/ Hardware Tools.

#### Part-A

#### **1. Write the rule for the rules for controlling digital evidence.**

- Comply with your state's rules of evidence or with the Federal Rules of Evidence
- Evidence admitted in a criminal case can be used in a civil suit, and vice versa
- Keep current on the latest rulings and directives on collecting, processing, storing, and admitting digital evidence
- Data you discover from a forensic examination falls under your state's rules of evidence

#### **2. Define Best evidence rule states:**

- To prove the content of a written document, recording, or photograph, ordinarily the original writing, recording, or photograph is required

#### **3. Define Federal Rules of Evidence**

- Allow a duplicate instead of originals when it is produced by the same impression as the original

#### **4. How to collect evidence at private-sector incident scenes.**

- Private-sector organizations include:
- Non-government organizations (NGO) must comply with state public disclosure and federal Freedom of Information Act (FOIA) laws
- FOIA allows citizens to request copies of public documents created by federal agencies

#### **5. Define Processing Law Enforcement Crime Scenes**

- Law enforcement officer may search for and seize criminal evidence only with **probable cause**
  - Refers to the standard specifying whether a police officer has the right to make an arrest, conduct a personal or property search, or obtain a warrant for arrest



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- With probable cause, a police officer can obtain a search warrant from a judge
  - That authorizes a search and seizure of specific evidence related to the criminal complaint

## 6. How to prepare for a search in criminal case.

### Preparing for a Search

- Preparing for a computer search and seizure
  - Probably the most important step in computing investigations
- To perform these tasks
  - You might need to get answers from the victim and an informant
    - Who could be a police detective assigned to the case, a law enforcement witness, or a manager or coworker of the **person of interest** to the investigation

## 7. Determining Whether You Can Seize Computers and Digital Devices in processing crime.

- The type of case and location of the evidence
  - Determine whether you can remove digital evidence
- Law enforcement investigators need a warrant to remove computers from a crime scene
  - And transport them to a lab
- If removing the computers will irreparably harm a business
  - The computers should not be taken offsite
- Additional complications:
  - Files stored offsite that are accessed remotely
  - Availability of cloud storage, which can't be located physically
    - Stored on drives where data from many other subscribers might be stored

## 8. How are the tools are used in processing crime and incident scene.

- Prepare tools using incident and crime scene information
- Create an initial-response field kit
  - Should be lightweight and easy to transport
- Create an extensive-response field kit
  - Includes all tools you can afford to take to the field



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- When at the scene, extract only those items you need to acquire evidence

## 9. How to prepare for a Preparing the Investigation Team

- Before initiating the search:
  - Review facts, plans, and objectives with the investigation team you have assembled
- Goal of scene processing
  - To collect and secure digital evidence
- Digital evidence is volatile
  - Develop skills to assess facts quickly
- Slow response can cause digital evidence to be lost

## 10. List out the Storing Digital Evidence.

- The media you use to store digital evidence usually depends on how long you need to keep it
- CDs, DVDs, DVD-Rs, DVD+Rs, or DVD-RWs
- Magnetic tapes - 4-mm DAT
- Super Digital Linear Tape (Super-DLT or SDLT)
- Smaller external SDLT drives can connect to a workstation through a SCSI card
- Don't rely on one media storage method to preserve your evidence

## 11. How to Reviewing a Case.

### Reviewing a Case

- General tasks you perform in any computer forensics case:
  - Identify the case requirements
  - Plan your investigation
  - Conduct the investigation
  - Complete the case report
  - Critique the case

## 12. Define file system.

- **File system**
  - Gives OS a road map to data on a disk
- Type of file system an OS uses determines how data is stored on the disk
- When you need to access a suspect's computer to acquire or inspect data

You should be familiar with both the computer's OS and file systems.



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

## 13. List out the disk drive components.

- Disk drive components
  - Geometry
  - Head
  - Tracks
  - Cylinders
  - Sectors
- Properties handled at the drive's hardware or firmware level
  - Zone bit recording (ZBR)
  - Track density
  - Areal density
  - Head and cylinder skew

## 14. Define Solid-State Storage Devices.

- All flash memory devices have a feature called **wear-leveling**
  - An internal firmware feature used in solid-state drives that ensures even wear of read/writes for all memory cells
- When dealing with solid-state devices, making a full forensic copy as soon as possible is crucial
  - In case you need to recover data from unallocated disk space

## 15. Define NTFS Encrypting File System (EFS)

- **Encrypting File System (EFS)**
  - Introduced with Windows 2000
  - Implements a **public key** and **private key** method of encrypting files, folders, or disk volumes
- When EFS is used in Windows 2000 and later
  - A **recovery certificate** is generated and sent to the local Windows administrator account

## 16. Define NTFS Disks

- **NT File System (NTFS)**
- Improvements over FAT file systems
- NTFS was Microsoft's move toward a journaling file system
  - It records a transaction before the system carries it out



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- In NTFS, everything written to the disk is considered a file
- On an NTFS disk
- NTFS results in much less file slack space
- Clusters are smaller for smaller disk drives
- NTFS also uses **Unicode**

## 17. Define Deleting NTFS Files

- When a file is deleted in Windows NT and later The OS renames it and moves it to the Recycle Bin
- Can use the Del (delete) MS-DOS command
  - Eliminates the file from the MFT listing in the same way FAT does

## 18. List out the Third-Party Disk Encryption Tools.

- Some available third-party WDE utilities:
  - **PGP Full Disk Encryption**
  - **Voltage SecureFile**
  - **Utimaco SafeGuard Easy**
  - **Jetico BestCrypt Volume Encryption**
  - **TrueCrypt**

## 19. Explain how the Windows Registry works

- Registry
  - A database that stores hardware and software configuration information, network connections, user preferences, and setup information
- To view the Registry, you can use:
  - Regedit (Registry Editor) program for Windows 9x systems
  - Regedt32 for Windows 2000, XP, and Vista
  - Both utilities can be used for Windows 7 and 8

## 20. List out the registry terminology.

- **Registry terminology:**
  - Registry
  - Registry Editor
  - HKEY
  - Key
  - Subkey



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Branch
- Value
- Default value
- Hives

## 21. How to create a virtual machine.

### Creating a Virtual Machine

- Popular applications for creating virtual machines
  - VMware Server, VMware Player and VMware Workstation, Oracle VM VirtualBox, Microsoft Virtual PC, and Hyper-V
- Using VirtualBox
  - An open-source program that can be downloaded at [www.virtualbox.org/wiki/Downloads](http://www.virtualbox.org/wiki/Downloads)
- Consult with your instructor before doing the activities using VirtualBox

## 22. List out the digital forensics tools.

### Types of Digital Forensics Tools

- Hardware forensic tools
  - Range from single-purpose components to complete computer systems and servers
- Software forensic tools
  - Types
    - Command-line applications
    - GUI applications
  - Commonly used to copy data from a suspect's disk drive to an image file

## 23. List the types of task performed by digital forensics tools.

- Five major categories:
  - Acquisition
  - Validation and verification
  - Extraction
  - Reconstruction
  - Reporting
  -



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

## 24. Define Validation and Verification

- **Validation**
  - A way to confirm that a tool is functioning as intended
- **Verification**
  - Proves that two sets of data are identical by calculating hash values or using another similar method
  - A related process is filtering, which involves sorting and searching through investigation findings to separate good data and suspicious data.

## 25. List out the Linux Forensics Tools

- UNIX
- Linux
- SMART
- Helix 3
- Kali Linux
- Autopsy and SleuthKit



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



## Part-B

### 1. Explain in detail about the concepts Processing Crime and Incident Scenes.

- *Explain the rules for controlling digital evidence*
- *Describe how to collect evidence at private-sector incident scenes*
- *Explain guidelines for processing law enforcement crime scenes*
- *List the steps in preparing for an evidence search*
- *Describe how to secure a computer incident or crime scene*
- *Explain guidelines for seizing digital evidence at the scene*
- *List procedures for storing digital evidence*
- *Explain how to obtain a digital hash*
- *Review a case to identify requirements and plan your investigation*

#### 1.1 Explain the rules for controlling digital evidence

##### Identifying Digital Evidence

- **Digital evidence**
  - Can be any information stored or transmitted in digital form
- **U.S. courts accept digital evidence as physical evidence**
  - Digital data is treated as a tangible object
- Groups such as the Scientific Working Group on Digital Evidence (SWGDE) set standards for recovering, preserving, and examining digital evidence
- **General tasks investigators perform when working with digital evidence:**
  - Identify digital information or artifacts that can be used as evidence
  - Collect, preserve, and document evidence
  - Analyze, identify, and organize evidence
  - Rebuild evidence or repeat a situation to verify that the results can be reproduced reliably
- **Collecting digital devices and processing a criminal or incident scene must be done systematically**

##### Understanding Rules of Evidence

- Consistent practices help verify your work and enhance your credibility





# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Comply with your state's rules of evidence or with the Federal Rules of Evidence
- Evidence admitted in a criminal case can be used in a civil suit, and vice versa
- Keep current on the latest rulings and directives on collecting, processing, storing, and admitting digital evidence
- Data you discover from a forensic examination falls under your state's rules of evidence
  - Or the Federal Rules of Evidence (FRE)
- Digital evidence is unlike other physical evidence because it can be changed more easily
  - The only way to detect these changes is to compare the original data with a duplicate
- Most federal courts have interpreted computer records as hearsay evidence
  - Hearsay is secondhand or indirect evidence
- Business-record exception
  - Allows "records of regularly conducted activity," such as business memos, reports, records, or data compilations
- Generally, digital records are considered admissible if they qualify as a business record
- Computer records are usually divided into:
  - **Computer-generated records**
  - **Computer-stored records**
- Computer and digitally stored records must be shown to be authentic and trustworthy
  - To be admitted into evidence
- Computer-generated records are considered authentic if the program that created the output is functioning correctly
  - Usually considered an exception to hearsay rule
- Collecting evidence according to the proper steps of evidence control helps ensure that the computer evidence is authentic
- When attorneys challenge digital evidence
  - Often they raise the issue of whether computer-generated records were altered or damaged



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- One test to prove that computer-stored records are authentic is to demonstrate that a specific person created the records
  - The author of a Microsoft Word document can be identified by using file metadata
- Follow the steps starting on page 141 of the text to see how to identify file metadata
- The process of establishing digital evidence's trustworthiness originated with written documents and the "best evidence rule"
- **Best evidence rule states:**
  - To prove the content of a written document, recording, or photograph, ordinarily the original writing, recording, or photograph is required
- **Federal Rules of Evidence**
  - Allow a duplicate instead of originals when it is produced by the same impression as the original
- **As long as bit-stream copies of data are created and maintained properly**
  - The copies can be admitted in court, although they aren't considered best evidence
- **Example of not being able to use original evidence**
  - Investigations involving network servers
  - Removing a server from the network to acquire evidence data could cause harm to a business or its owner, who might be an innocent bystander to a crime or civil wrong

## 1.2 Describe how to collect evidence at private-sector incident scenes

### Collecting Evidence in Private-Sector Incident Scenes

**Private-sector organizations include:**

- Businesses and government agencies that aren't involved in law enforcement
- **Non-government organizations (NGO) must comply with state public disclosure and federal Freedom of Information Act (FOIA) laws**
  - And make certain documents available as public records
- **FOIA allows citizens to request copies of public documents created by federal agencies**



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- A special category of private-sector businesses includes ISPs and other communication companies
- ISPs can investigate computer abuse committed by their employees, but not by customers
  - Except for activities that are deemed to create an emergency situation
- Investigating and controlling computer incident scenes in the corporate environment
  - Much easier than in the criminal environment
  - Incident scene is often a workplace
- Typically, businesses have inventory databases of computer hardware and software
  - Help identify the computer forensics tools needed to analyze a policy violation
    - And the best way to conduct the analysis
- Corporate policy statement about misuse of digital assets
  - Allows corporate investigators to conduct covert surveillance with little or no cause
  - And access company systems without a warrant
- Companies should display a warning banner and publish a policy
  - Stating that they reserve the right to inspect computing assets at will
- Corporate investigators should know under what circumstances they can examine an employee's computer
  - Every organization must have a well-defined process describing when an investigation can be initiated
- If a corporate investigator finds that an employee is committing or has committed a crime
  - Employer can file a criminal complaint with the police
- Employers are usually interested in enforcing company policy
  - Not seeking out and prosecuting employees
- Corporate investigators are, therefore, primarily concerned with protecting company assets



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- If you discover evidence of a crime during a company policy investigation
  - Determine whether the incident meets the elements of criminal law
  - Inform management of the incident
  - Stop your investigation to make sure you don't violate Fourth Amendment restrictions on obtaining evidence
  - Work with the corporate attorney on how to respond to a police request for more information

## 1.3 Explain guidelines for processing law enforcement crime scenes

### Processing Law Enforcement Crime Scenes

- You must be familiar with criminal rules of search and seizure
- You should also understand how a search warrant works and what to do when you process one
- Law enforcement officer may search for and seize criminal evidence only with **probable cause**
  - Refers to the standard specifying whether a police officer has the right to make an arrest, conduct a personal or property search, or obtain a warrant for arrest
- With probable cause, a police officer can obtain a search warrant from a judge
  - That authorizes a search and seizure of specific evidence related to the criminal complaint
- The Fourth Amendment states that only warrants “particularly describing the place to be searched, and the persons or things to be seized” can be issued

### Understanding Concepts and Terms Used in Warrants

- Innocent information
  - Unrelated information
  - Often included with the evidence you're trying to recover
- Judges often issue a limiting phrase to the warrant
  - Allows the police to separate innocent information from evidence
- **Plain view doctrine**
  - Objects falling in plain view of an officer who has the right to be in position to have that view are subject to seizure without a warrant and may be



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

introduced in evidence

- Three criteria must be met:
  - Officer is where he or she has a legal right to be
  - Ordinary senses must not be enhanced by advanced technology in any way
  - Any discovery must be by chance
- The plain view doctrine's applicability in the digital forensics world is being rejected
- Example - In a case where police were searching a computer for evidence related to illegal drug trafficking:
  - If an examiner observes an .avi file and find child pornography, he must get an additional warrant or an expansion of the existing warrant to continue the search for child pornography

## 1.4 List the steps in preparing for an evidence search

### Preparing for a Search

- Preparing for a computer search and seizure
  - Probably the most important step in computing investigations
- To perform these tasks
  - You might need to get answers from the victim and an informant
    - Who could be a police detective assigned to the case, a law enforcement witness, or a manager or coworker of the **person of interest** to the investigation

### Identifying the Nature of the Case

- When you're assigned a digital investigation case
  - Start by identifying the nature of the case
    - Including whether it involves the private or public sector
- The nature of the case dictates how you proceed
  - And what types of assets or resources you need to use in the investigation

### Identifying the Type of OS or Digital Device

- For law enforcement



# SNS COLLEGE OF ENGINEERING



## AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- This step might be difficult because the crime scene isn't controlled
- If you can identify the OS or device
  - Estimate the size of the drive on the suspect's computer
    - And how many devices to process at the scene
- Determine which OSs and hardware are involved

### **Determining Whether You Can Seize Computers and Digital Devices**

- The type of case and location of the evidence
  - Determine whether you can remove digital evidence
- Law enforcement investigators need a warrant to remove computers from a crime scene
  - And transport them to a lab
- If removing the computers will irreparably harm a business
  - The computers should not be taken offsite
- Additional complications:
  - Files stored offsite that are accessed remotely
  - Availability of cloud storage, which can't be located physically
    - Stored on drives where data from many other subscribers might be stored
- If you aren't allowed to take the computers to your lab
  - Determine the resources you need to acquire digital evidence and which tools can speed data acquisition

### **Getting a Detailed Description of the Location**

- Get as much information as you can about the location of a digital crime
- Identify potential hazards
  - Interact with your HAZMAT (hazardous materials) team
- HAZMAT guidelines
  - Put the target drive in a special HAZMAT bag
  - HAZMAT technician can decontaminate the bag
  - Check for high temperatures

### **Determining Who Is in Charge**

- Corporate computing investigations
  - Usually require only one person to respond to an incident



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Law enforcement agencies
  - Typically handle large-scale investigations
- Designate lead investigators in large-scale investigations
  - Anyone assigned to the scene should cooperate with the designated leader to ensure the team addresses all details when collecting evidence

## Using Additional Technical Expertise

- Determine whether you need specialized help to process the incident or crime scene
- You may need to look for specialists in:
  - OSs
  - RAID servers
  - Databases
- Finding the right person can be a challenge
- Educate specialists in investigative techniques
  - Prevent evidence damage

## Determining the Tools You Need

- Prepare tools using incident and crime scene information
- Create an initial-response field kit
  - Should be lightweight and easy to transport
- Create an extensive-response field kit
  - Includes all tools you can afford to take to the field



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



Digital forensics kit



Laptop computer



Digital camera



Flashlight

**Figure 4-4** Items in an initial-response field kit  
© Cengage Learning®

**Table 4-1** Tools in an initial-response field kit

Number needed	Tools
1	Small computer toolkit
1	Large-capacity drive
1	IDE ribbon cable (ATA-33 or ATA-100)
1	SATA cables
1	Forensic boot media containing an acquisition utility
1	Laptop IDE 40- to 44-pin adapter, other adapter cables
1	Laptop or tablet computer
1	FireWire or USB dual write-protect external bay
1	Flashlight
1	Digital camera with extra batteries or 35mm camera with film and flash
10	Evidence log forms
1	Notebook or digital dictation recorder
10	Computer evidence bags (antistatic bags)
20	Evidence labels, tape, and tags
1	Permanent ink marker
10	External USB devices or a portable hard drive

© 2015 Cengage Learning®

– When at the scene, extract only those items you need to acquire evidence





# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



**Table 4-2 Tools in an extensive-response field kit**

Number needed	Tools
Varies	Assorted technical manuals, ranging from OS references to forensic analysis guides
1	Initial-response field kit
1	Laptop or tablet with cables and connectors
2	Electrical power strips
1	Additional hand tools, including bolt cutters, pry bar, and hacksaw
1	Leather gloves and disposable latex gloves (assorted sizes)
1	Hand truck and luggage cart
10	Large garbage bags and large cardboard boxes with packaging tape
1	Rubber bands of assorted sizes
1	Magnifying glass
1	Ream of printer paper
1	Small brush for cleaning dust from digital devices

Number needed	Tools
10	USB drives of varying sizes
2	External hard drives (1 TB or larger) with power cables
Assorted	Converter cables
5	Additional assorted hard drives or flash drives for data acquisition

© 2015 Cengage Learning®

## Preparing the Investigation Team

- Before initiating the search:
  - Review facts, plans, and objectives with the investigation team you have assembled
- Goal of scene processing
  - To collect and secure digital evidence
- Digital evidence is volatile
  - Develop skills to assess facts quickly
- Slow response can cause digital evidence to be lost

## 1.5 Describe how to secure a computer incident or crime scene

### Securing a Computer Incident or Crime Scene

- Goals



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Preserve the evidence
- Keep information confidential
- Define a secure perimeter
  - Use yellow barrier tape
  - Legal authority for a corporate incident includes trespassing violations
  - For a crime scene, it includes obstructing justice or failing to comply with a police officer
- Professional curiosity can destroy evidence
  - Involves police officers and other professionals who aren't part of the crime scene processing team
- Automated Fingerprint Identification System (AFIS)
  - A computerized system for identifying fingerprints that's connected to a central database
  - Used to identify criminal suspects and review thousands of fingerprint samples at high speed
- Police can take elimination prints of everyone who had access to the crime scene

## 1.6 Explain guidelines for seizing digital evidence at the scene

### Seizing Digital Evidence at the Scene

- Law enforcement can seize evidence
  - With a proper warrant
- Corporate investigators might have the authority only to make an image of the suspect's drive
- When seizing digital evidence in criminal investigations
  - Follow U.S. DoJ standards for seizing digital data
- Civil investigations follow same rules
  - Require less documentation though
- Consult with your attorney for extra guidelines

### Preparing to Acquire Digital Evidence

- The evidence you acquire at the scene depends on the nature of the case
  - And the alleged crime or violation



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Ask your supervisor or senior forensics examiner in your organization the following questions:
  - Do you need to take the entire computer and all peripherals and media in the immediate area?
  - How are you going to protect the computer and media while transporting them to your lab?
  - Is the computer powered on when you arrive?
- Ask your supervisor or senior forensics examiner in your organization the following questions (cont'd):
  - Is the suspect you're investigating in the immediate area of the computer?
  - Is it possible the suspect damaged or destroyed the computer, peripherals, or media?
  - Will you have to separate the suspect from the computer?

## Processing an Incident or Crime Scene

- Guidelines
  - Keep a journal to document your activities
  - Secure the scene
    - Be professional and courteous with onlookers
    - Remove people who are not part of the investigation
  - Take video and still recordings of the area around the computer
    - Pay attention to details
  - Sketch the incident or crime scene
  - Check state of computers as soon as possible
  - Don't cut electrical power to a running system unless it's an older Windows 9x or MS-DOS system
  - Save data from current applications as safely as possible
  - Record all active windows or shell sessions
  - Make notes of everything you do when copying data from a live suspect computer
  - Close applications and shut down the computer



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Bag and tag the evidence, following these steps:
  - Assign one person to collect and log all evidence
  - Tag all evidence you collect with the current date and time, serial numbers or unique features, make and model, and the name of the person who collected it
  - Maintain two separate logs of collected evidence
  - Maintain constant control of the collected evidence and the crime or incident scene
- Guidelines (cont'd)
  - Look for information related to the investigation
    - Passwords, passphrases, PINs, bank accounts
  - Collect documentation and media related to the investigation
    - Hardware, software, backup media, documentation, manuals

## Processing Data Centers with RAID Systems

- Sparse acquisition
  - Technique for extracting evidence from large systems
  - Extracts only data related to evidence for your case from allocated files
    - And minimizes how much data you need to analyze
- Drawback of this technique
  - It doesn't recover data in free or slack space

## Using a Technical Advisor

- A technical advisor can help:
  - List the tools you need to process the incident or crime scene
  - Guide you about where to locate data and helping you extract log records
    - Or other evidence from large RAID servers
  - Create the search warrant by itemizing what you need for the warrant
- Responsibilities
  - Know all aspects of the seized system
  - Direct investigator handling sensitive material
  - Help secure the scene
  - Help document the planning strategy
  - Conduct ad hoc trainings



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Document activities
- Help conduct the search and seizure

## Documenting Evidence in the Lab

- Record your activities and findings as you work
  - Maintain a journal to record the steps you take as you process evidence
- Your goal is to be able to reproduce the same results
  - When you or another investigator repeat the steps you took to collect evidence
- A journal serves as a reference that documents the methods you used to process digital evidence

## Processing and Handling Digital Evidence

- Maintain the integrity of digital evidence in the lab
  - As you do when collecting it in the field
- Steps to create image files:
  - Copy all image files to a large drive
  - Start your forensics tool to analyze the evidence
  - Run an MD5 or SHA-1 hashing algorithm on the image files to get a digital hash
  - Secure the original media in an evidence locker

### 1.7 List procedures for storing digital evidence

#### Storing Digital Evidence

- The media you use to store digital evidence usually depends on how long you need to keep it
- CDs, DVDs, DVD-Rs, DVD+Rs, or DVD-RWs
  - The ideal media
  - Capacity: up to 17 GB
  - Lifespan: 2 to 5 years
- Magnetic tapes - 4-mm DAT
  - Capacity: 40 to 72 GB
  - Lifespan: 30 years
  - Costs: drive: \$400 to \$800; tape: \$40



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Super Digital Linear Tape (Super-DLT or SDLT)
  - Specifically designed for large RAID data backups
  - Can store more than 1 TB of data
- Smaller external SDLT drives can connect to a workstation through a SCSI card
- Don't rely on one media storage method to preserve your evidence
  - Make two copies of every image to prevent data loss
  - Use different tools to create the two images

## Evidence Retention and Media Storage Needs

- To help maintain the chain of custody for digital evidence
  - Restrict access to lab and evidence storage area
- Lab should have a sign-in roster for all visitors
  - Maintain logs for a period based on legal requirements
- You might need to retain evidence indefinitely
  - Check with your local prosecuting attorney's office or state laws to make sure you're in compliance

Item description:				
Item tag number:				
Person	Date logged out	Time logged out	Date logged in	Time logged in

Figure 4-5 A sample log file  
© Cengage Learning®

## Documenting Evidence

- Create or use an evidence custody form
- An evidence custody form serves the following functions:
  - Identifies the evidence
  - Identifies who has handled the evidence



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Lists dates and times the evidence was handled
- You can add more information to your form
  - Such as a section listing MD5 and SHA-1 hash values
- Include any detailed information you might need to reference
- Evidence bags also include labels or evidence forms you can use to document your evidence
  - Use antistatic bags for electronic components

## 1.8 Explain how to obtain a digital hash

### Obtaining a Digital Hash

- **Cyclic Redundancy Check (CRC)**
  - Mathematical algorithm that determines whether a file's contents have changed
  - Not considered a forensic hashing algorithm
- **Message Digest 5 (MD5)**
  - Mathematical formula that translates a file into a hexadecimal code value, or a **hash value**
  - If a bit or byte in the file changes, it alters the hash value, which can be used to verify a file or drive has not been tampered
- Three rules for forensic hashes:
  - You can't predict the hash value of a file or device
  - No two hash values can be the same
  - If anything changes in the file or device, the hash value must change
- **Secure Hash Algorithm version 1 (SHA-1)**
  - A newer hashing algorithm
  - Developed by the **National Institute of Standards and Technology (NIST)**
- In both MD5 and SHA-1, collisions have occurred
- Most digital forensics hashing needs can be satisfied with a **nonkeyed hash set**
  - A unique hash number generated by a software tool, such as the Linux md5sum command
- **Keyed hash set**



# SNS COLLEGE OF ENGINEERING




AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Created by an encryption utility's secret key
- You can use the MD5 function in FTK Imager to obtain the digital signature of a file
  - Or an entire drive

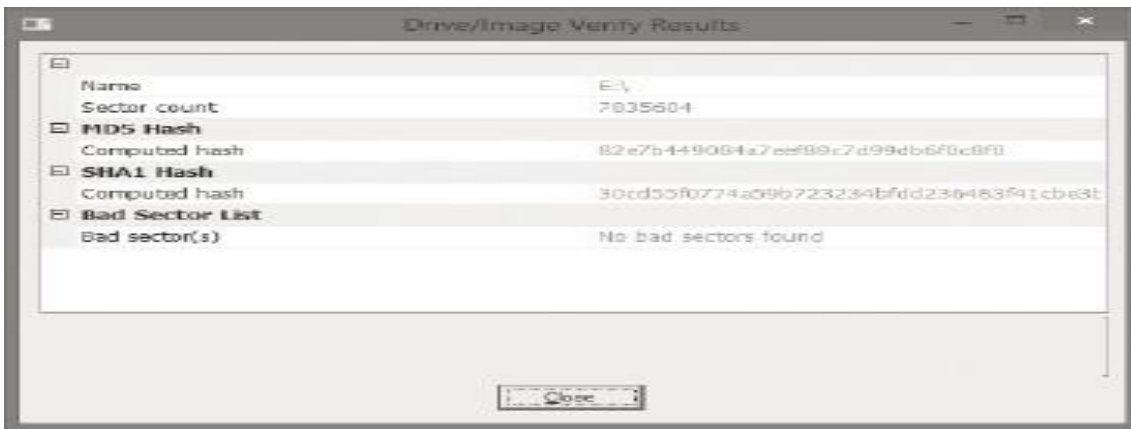

**Figure 4-6** Using FTK Imager to verify hash values  
Courtesy of AccessData Group, Inc.

## 1.9 Review a case to identify requirements and plan your investigation

### Reviewing a Case

- General tasks you perform in any computer forensics case:
  - Identify the case requirements
  - Plan your investigation
  - Conduct the investigation
  - Complete the case report
  - Critique the case

### Sample Civil Investigation

- Most cases in the corporate environment are considered **low-level investigations**
  - Or noncriminal cases
- Common activities and practices
  - Recover specific evidence
    - Suspect's Outlook e-mail folder (PST file)
  - **Covert surveillance**
    - Its use must be well defined in the company policy
    - Risk of civil or criminal liability
  - **Sniffing** tools for data transmissions

### Sample Criminal Investigation

- Computer crimes examples





# SNS COLLEGE OF ENGINEERING




AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Fraud
- Check fraud
- Homicides
- Need a warrant to start seizing evidence
  - Limit searching area

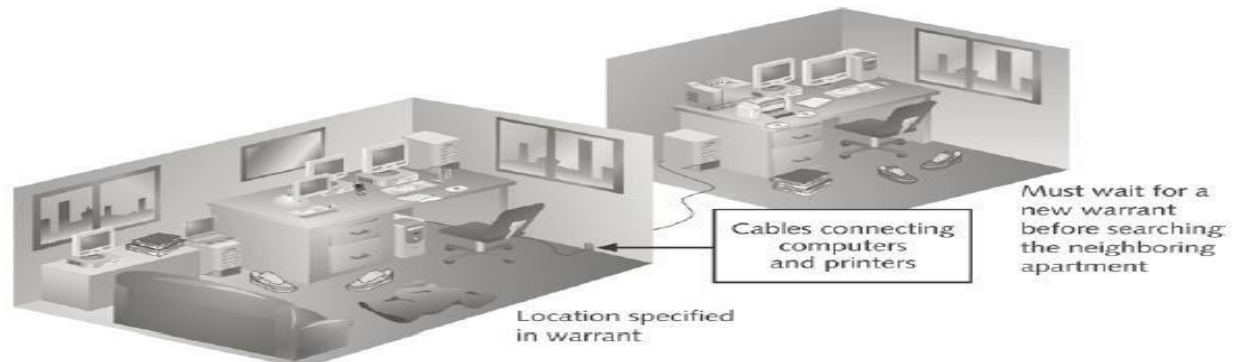

**Figure 4-7** Search warrant limits  
© Cengage Learning®

## Reviewing Background Information for a Case

- Throughout the book, you use data files from the hypothetical M57 Patents case
  - A new startup company doing art patent searches
  - A computer sold on Craigslist was discovered to contain “kitty” porn
  - It was traced back to M57 Patents

## 1.9 Review a case to identify requirements and plan your investigation

### Planning Your Investigation

- Background information on the case
  - Main players:
    - Pat McGoo, CEO
    - Terry, the IT person
    - Jo and Charlie, the patent researchers
- Police made forensic copies of:
  - The image of the computer sold on Craigslist
  - Images of five other machines found at M57
  - Images of four USB drives found at M57
- Police made forensic copies of (cont'd):
  - RAM from the imaged machines



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION



Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Network data from the M57 Patents servers

## 2. Explain in detail about the Working with Windows and DOS Systems.

- *Explain the purpose and structure of file systems*
- *Describe Microsoft file structures*
- *Explain the structure of NTFS disks*
- *List some options for decrypting drives encrypted with whole disk encryption*
- *Explain how the Windows Registry works*
- *Describe Microsoft startup tasks*
- *Explain the purpose of a virtual machine*


### 2.1 Explain the purpose and structure of file systems.

#### Understanding File Systems

- **File system**
  - Gives OS a road map to data on a disk
- Type of file system an OS uses determines how data is stored on the disk
- When you need to access a suspect's computer to acquire or inspect data
  - You should be familiar with both the computer's OS and file systems

#### Understanding the Boot Sequence


- Complementary Metal Oxide Semiconductor (CMOS)
  - Computer stores system configuration and date and time information in the CMOS
    - When power to the system is off
- Basic Input/Output System (BIOS) or Extensible Firmware Interface (EFI)
  - Contains programs that perform input and output at the hardware level
- **Bootstrap process**
  - Contained in ROM, tells the computer how to proceed
  - Displays the key or keys you press to open the CMOS setup screen
- CMOS should be modified to boot from a forensic floppy disk or CD

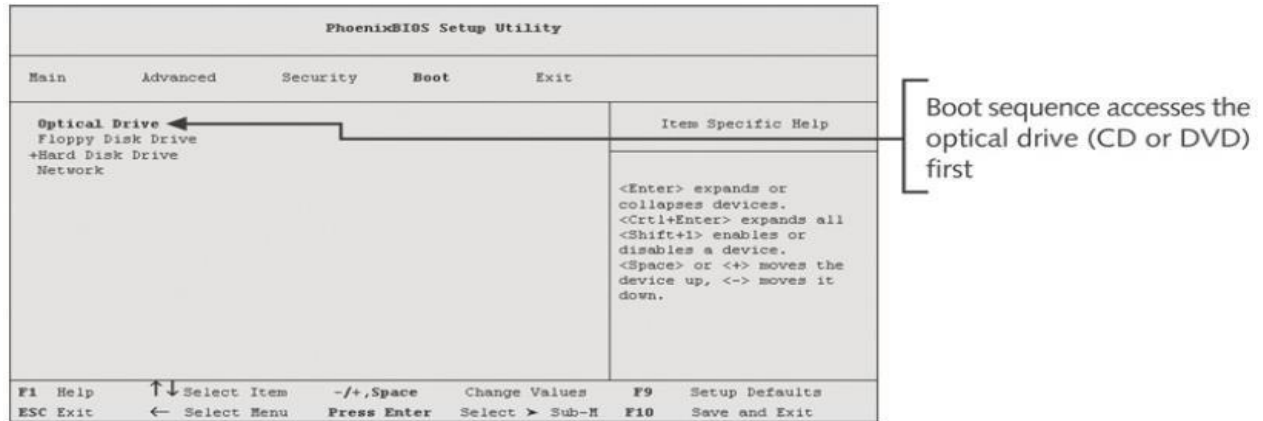


**Figure 5-1** A typical CMOS setup screen  
Courtesy of Phoenix Technologies, Ltd.

### Understanding Disk Drives

- Disk drives are made up of one or more platters coated with magnetic material
- Disk drive components
  - Geometry
  - Head
  - Tracks
  - Cylinders
  - Sectors

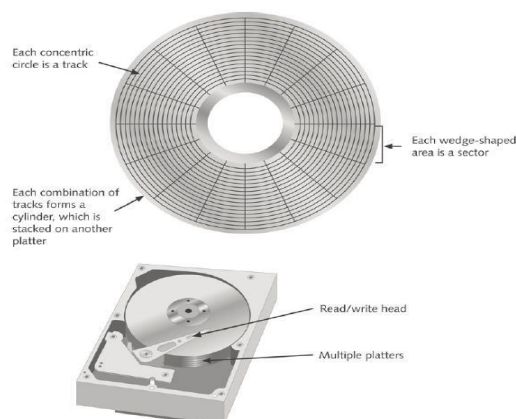

**Figure 5-2** Components of a disk drive  
© Cengage Learning®

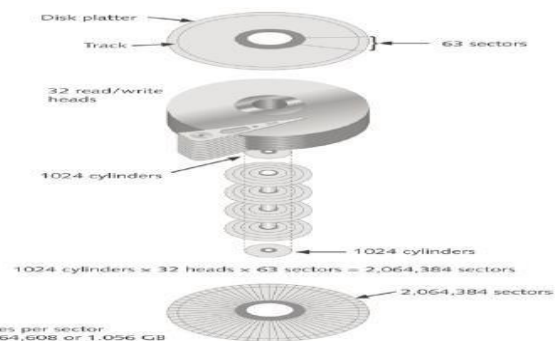

- Properties handled at the drive's hardware or firmware level
  - Zone bit recording (ZBR)
  - Track density
  - Areal density



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Head and cylinder skew

## Solid-State Storage Devices

- All flash memory devices have a feature called **wear-leveling**
  - An internal firmware feature used in solid-state drives that ensures even wear of read/writes for all memory cells
- When dealing with solid-state devices, making a full forensic copy as soon as possible is crucial
  - In case you need to recover data from unallocated disk space

## 2.2 Describe Microsoft file structures

### Exploring Microsoft File Structures

- In Microsoft file structures, sectors are grouped to form **clusters**
  - Storage allocation units of one or more sectors
- Clusters range from 512 bytes up to 32,000 bytes each
- Combining sectors minimizes the overhead of writing or reading files to a disk
- Clusters are numbered sequentially starting at 0 in NTFS and 2 in FAT
  - First sector of all disks contains a system area, the boot record, and a file structure database
- OS assigns these cluster numbers, called **logical addresses**
- Sector numbers are called **physical addresses**
- Clusters and their addresses are specific to a logical disk drive, which is a disk partition

### Disk Partitions

- A partition is a logical drive
- Windows OSs can have three primary partitions followed by an extended partition that can contain one or more logical drives
- Hidden partitions or voids
  - Large unused gaps between partitions on a disk
- Partition gap
  - Unused space between partitions



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



**Table 5-1 Hexadecimal codes in the partition table**

Hexadecimal code	File system
01	DOS 12-bit FAT (floppy disks)
04	DOS 16-bit FAT for partitions smaller than 32 MB
05	Extended partition
06	DOS 16-bit FAT for partitions larger than 32 MB
07	NTFS and exFAT
08	AIX bootable partition
09	AIX data partition
0B	DOS 32-bit FAT
0C	DOS 32-bit FAT for interrupt 13 support
0F	Extended Partition with Logical Block Address (LBA)
17	Hidden NTFS partition (XP and earlier)
1B	Hidden FAT32 partition
1E	Hidden VFAT partition
3C	Partition Magic recovery partition
66–69	Novell partitions
81	Linux
82	Linux swap partition (can also be associated with Solaris partitions)
83	Linux native file systems (Ext2, Ext3, Ext4, Reiser, Xiafs)
86	FAT16 volume/stripe set (Windows NT)
87	High Performance File System (HPFS) fault-tolerant mirrored partition or NTFS volume/stripe set
A5	FreeBSD and BSD/386
A6	OpenBSD
A9	NetBSD
C7	Typical of a corrupted NTFS volume/stripe set
EB	BeOS

© 2015 Cengage Learning®

- The partition table is in the **Master Boot Record (MBR)**
  - Located at sector 0 of the disk drive
- MBR stores information about partitions on a disk and their locations, size, and other important items
- In a hexadecimal editor, such as WinHex, you can find the first partition at offset 0x1BE
  - The file system's hexadecimal code is offset 3 bytes from 0x1BE for the first partition

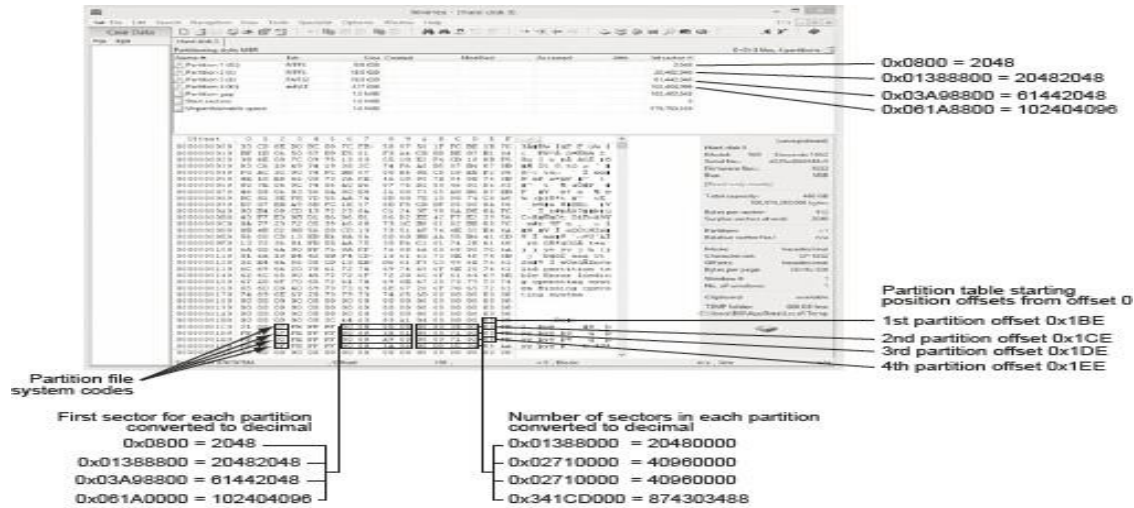


Figure 5-4 The partition table in a hexadecimal editor

## Examining FAT Disks

- File Allocation Table (FAT)
  - File structure database that Microsoft originally designed for floppy disks
- FAT database is typically written to a disk’s outermost track and contains:
  - Filenames, directory names, date and time stamps, the starting cluster number, and file attributes
- Three current FAT versions
  - FAT16, FAT32, and exFAT (used by Xbox game systems)
- Cluster sizes vary according to the hard disk size and file system

Table 5-2 Sectors and bytes per cluster

Drive size	Sectors per cluster	FAT16
8–32 MB	1	512 bytes
32–64 MB	2	1 KB
64–128 MB	4	2 KB
128–256 MB	8	4 KB
256–512 MB	16	8 KB
512–1024 MB	32	16 KB
1024–2048 MB	64	32 KB
2048–4096 MB	128	64 KB

© Cengage Learning®

- Microsoft OSs allocate disk space for files by clusters
  - Results in **drive slack**
    - Unused space in a cluster between the end of an active file and the end of the cluster



# SNS COLLEGE OF ENGINEERING


AN AUTONOMOUS INSTITUTION



Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Drive slack includes:
  - **RAM slack** and **file slack**
- An unintentional side effect of FAT16 having large clusters was that it reduced fragmentation
  - As cluster size increased

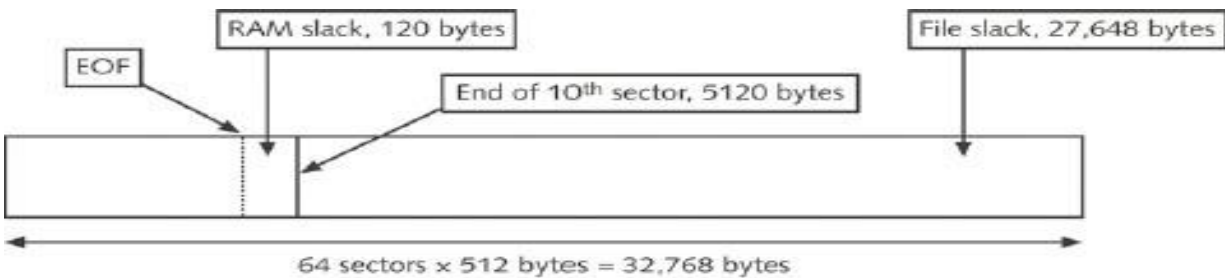

**Figure 5-8** File slack space  
© 2015 Cengage Learning®

- When you run out of room for an allocated cluster
  - OS allocates another cluster for your file, which creates more slack space on the disk
- As files grow and require more disk space, assigned clusters are chained together
  - The chain can be broken or fragmented
- When the OS stores data in a FAT file system, it assigns a starting cluster position to a file

Data for the file is written to the first sector of the first assigned cluster



**Figure 5-9** Chained sectors associated with clusters as a result of increasing file size  
Courtesy of Technology Pathways, LLC

- When this first assigned cluster is filled and runs out of room



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- FAT assigns the next available cluster to the file
- If the next available cluster isn't contiguous to the current cluster
  - File becomes fragmented

## Deleting FAT Files

- In Microsoft OSs, when a file is deleted
  - Directory entry is marked as a deleted file
    - With the HEX E5 character replacing the first letter of the filename
    - FAT chain for that file is set to 0
- Data in the file remains on the disk drive
- Area of the disk where the deleted file resides becomes **unallocated disk space**
  - Available to receive new data from newly created files or other files needing more space

## 2.3 Explain the structure of NTFS disks

### NTFS Disks

- **NT File System (NTFS)**
  - Introduced with Windows NT
  - Primary file system for Windows 8
- Improvements over FAT file systems
  - NTFS provides more information about a file
  - NTFS gives more control over files and folders
- NTFS was Microsoft's move toward a journaling file system
  - It records a transaction before the system carries it out
- In NTFS, everything written to the disk is considered a file
- On an NTFS disk
  - First data set is the **Partition Boot Sector**
  - Next is **Master File Table (MFT)**
- NTFS results in much less file slack space
- Clusters are smaller for smaller disk drives
- NTFS also uses **Unicode**
  - An international data format





# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



**Table 5-3 Cluster sizes in an NTFS disk**

Drive size	Sectors per cluster	Cluster size
7–512 MB	8	4 KB
512 MB–1 GB	8	4 KB
1–2 GB	8	4 KB
2 GB–2 TB	8	4 KB
2–16 TB	8	4 KB
16–32 TB	16	8 KB
32–64 TB	32	16 KB
64–128 TB	64	32 KB
128–256 TB	128	64 KB

© 2015 Cengage Learning®

## NTFS System Files

- MFT contains information about all files on the disk
  - Including the system files the OS uses
- In the MFT, the first 15 records are reserved for system files
- Records in the MFT are called metadata

**Table 5-4 Metadata records in the MFT**

Filename	System file	Record position	Description
\$Mft	MFT	0	Base file record for each folder on the NTFS volume; other record positions in the MFT are allocated if more space is needed.
\$MftMirr	MFT 2	1	The first four records of the MFT are saved in this position. If a single sector fails in the first MFT, the records can be restored, allowing recovery of the MFT.
\$LogFile	Log file	2	Previous transactions are stored here to allow recovery after a system failure in the NTFS volume.
\$Volume	Volume	3	Information specific to the volume, such as label and version, is stored here.
\$AttrDef	Attribute definitions	4	A table listing attribute names, numbers, and definitions.
\$	Root filename index	5	This is the root folder on the NTFS volume.
\$Bitmap	Cluster bitmap	6	A map of the NTFS partition shows which clusters are in use and which are available.
\$Boot	Boot sector	7	Used to mount the NTFS volume during the bootstrap process; additional code is listed here if it's the boot drive for the system.
\$BadClus	Bad cluster file	8	For clusters that have unrecoverable errors, an entry of the cluster location is made in this file.
\$Secure	Security file	9	Unique security descriptors for the volume are listed in this file. It's where the access control list (ACL) is maintained for all files and folders on the NTFS volume.
\$Upcase	Upcase table	10	Converts all lowercase characters to uppercase Unicode characters for the NTFS volume.
\$ExtEnd	NTFS extension file	11	Optional extensions are listed here, such as quotas, object identifiers, and reparse point data.
		12–15	Reserved for future use.

© 2015 Cengage Learning®

## MFT and File Attributes

- In the NTFS MFT
  - All files and folders are stored in separate records of 1024 bytes each



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION



Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Each record contains file or folder information
  - This information is divided into record fields containing metadata
- A record field is referred to as an attribute ID
- File or folder information is typically stored in one of two ways in an MFT record:
  - Resident and nonresident
- Files larger than 512 bytes are stored outside the MFT
  - MFT record provides cluster addresses where the file is stored on the drive's partition
    - Referred to as **data runs**
- Each MFT record starts with a header identifying it as a resident or nonresident attribute

**Table 5-5 Attributes in the MFT**

Attribute ID	Purpose
0x10	<b>\$Standard Information</b> This field contains data on file creation, alterations, MFT changes, read dates and times, and DOS file permissions.
0x20	<b>\$Attribute_List</b> Attributes that don't fit in the MFT (nonresident attributes) are listed here along with their locations.
0x30	<b>\$File_Name</b>

**Table 5-5 Attributes in the MFT (continued)**

Attribute ID	Purpose
0x60	<b>\$Volume_Name</b> The volume-unique file identifier is listed here. Not all files need this unique identifier.
0x70	<b>\$Volume_Information</b> This field indicates the version and state of the volume.
0x80	<b>\$Data</b> File data for resident files or data runs for nonresident files.
0x90	<b>\$Index_Root</b> Implemented for use of folders and indexes.
0xA0	<b>\$Index_Allocation</b> Implemented for use of folders and indexes.
0xB0	<b>\$Bitmap</b> A bitmap indicating cluster status, such as which clusters are in use and which are available.
0xC0	<b>\$Reparse_Point</b> This field is used for volume mount points and Installable File System (IFS) filter drivers. For the IFS, it marks specific files used by drivers.
0xD0	<b>\$EA_Information</b> For use with OS/2 HPFS.
0xE0	For use with OS/2 HPFS.
0x100	<b>\$Logged_UTILITY_Stream</b> This field is used by Encrypting File System (EFS) in Windows 2000 and later




# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION


Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

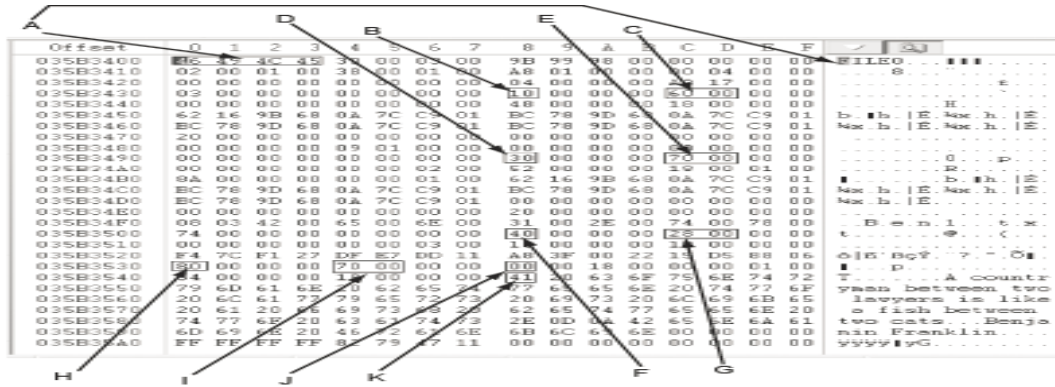

- A: All MFT records start with FILE0
- B: Start of attribute 0x10
- C: Length of attribute 0x10 (value 60)
- D: Start of attribute 0x30
- E: Length of attribute 0x30 (value 70)
- F: Start of attribute 0x40
- G: Length of attribute 0x40 (value 28)
- H: Start of attribute 0x80
- I: Length of attribute 0x80 (value 70)
- J: Attribute 0x80 resident flag
- K: Starting position of resident data

Figure 5-10 Resident file in an MFT record  
Courtesy of X-Ways AG, www.x-ways.net

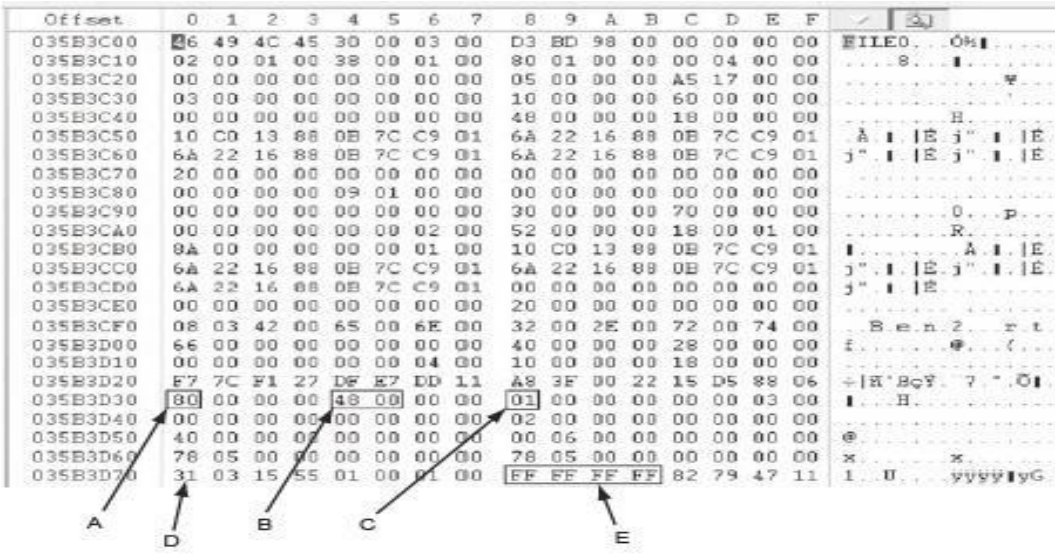

- A: Start of nonresident attribute 0x80
- B: Length of nonresident attribute 0x80
- C: Attribute 0x80 nonresident flag
- D: Starting point of data run
- E: End-of-record marker (FF FF FF FF) for the MFT record

Figure 5-12 Nonresident file in an MFT record  
Courtesy of X-Ways AG, www.x-ways.net

- When a disk is created as an NTFS file structure
  - OS assigns logical clusters to the entire disk partition
- These assigned clusters are called **logical cluster numbers (LCNs)**
  - Become the addresses that allow the MFT to link to nonresident files on the disk's partition



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with ‘A’ Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- When data is first written to nonresident files, an LCN address is assigned to the file
  - This LCN becomes the file’s **virtual cluster number (VCN)**

## MFT Structures for File Data

- For the header of all MFT records, the record fields of interest are as follows:
  - At offset 0x00 - the MFT record identifier FILE
  - At offset 0x1C to 0x1F - size of the MFT record
  - At offset 0x14 - length of the header (indicates where the next attribute starts)
  - At offset 0x32 and 0x33 - the update sequence array, which stores the last 2 bytes of the first sector of the MFT record

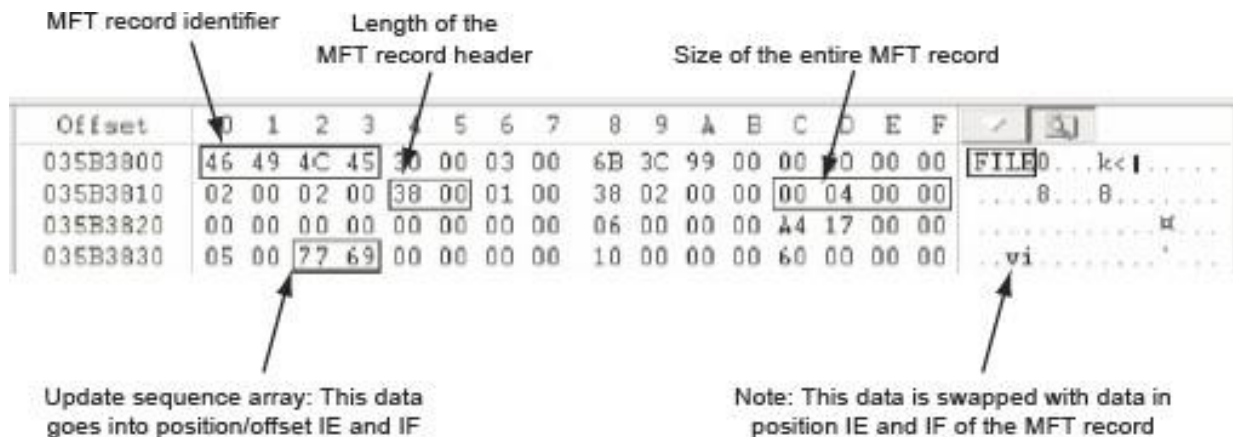


Figure 5-13 An MFT header  
Courtesy of X-Ways AG, www.x-ways.net

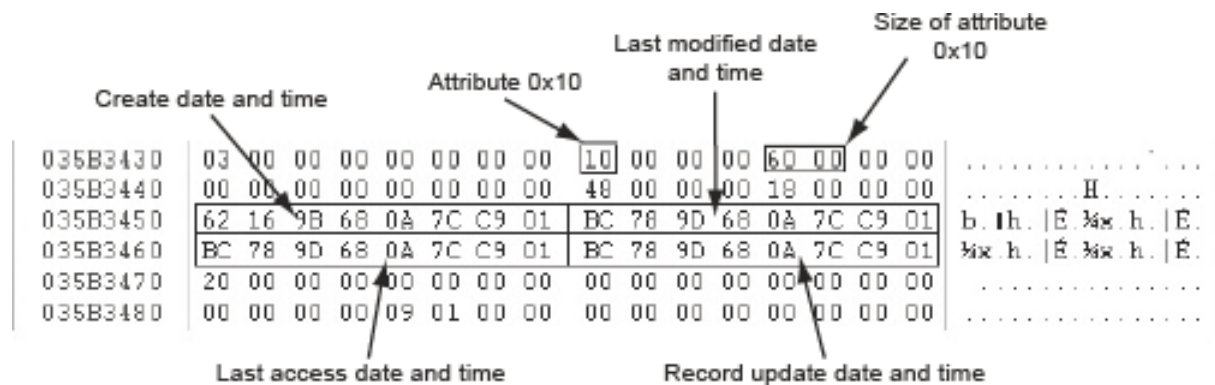


Figure 5-14 Attribute 0x10: Standard Information  
Courtesy of X-Ways AG, www.x-ways.net




# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION


Accredited by NAAC – UGC with ‘A’ Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

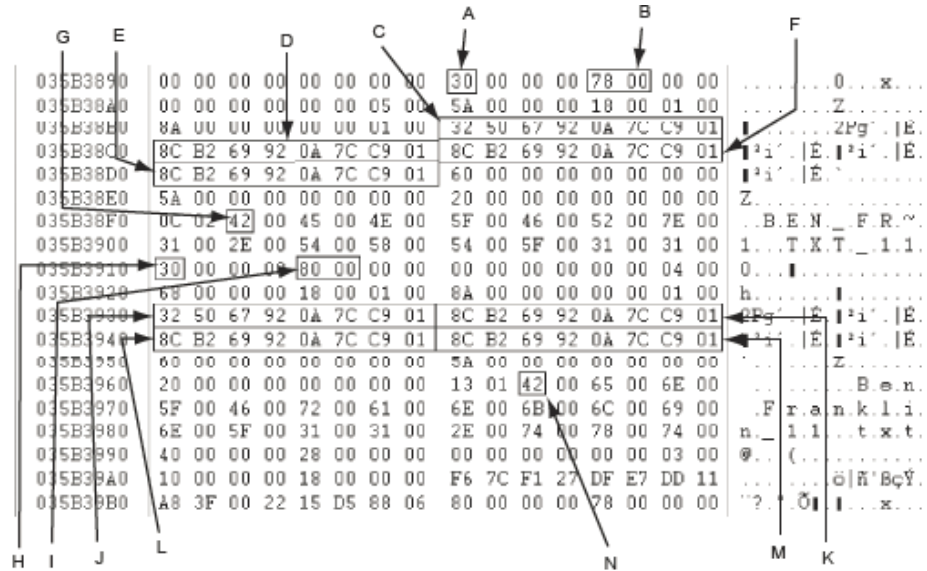

- A: Attribute 0x30 short filename
- B: Size of attribute 0x30 short filename
- C: Short create date and time
- D: Short last modified date and time
- E: Short last access date and time
- F: Short record update date and time
- G: Starting position of short filename
- H: Attribute 0x30 long filename
- I: Size of attribute 0x30 long filename
- J: Long create date and time
- K: Long last modified date and time
- L: Long last access date and time
- M: Long record update date and time
- N: Starting position of long filename

**Figure 5-15** Attributes 0x30: short and long filenames  
 Courtesy of X-Ways AG, [www.x-ways.net](http://www.x-ways.net)

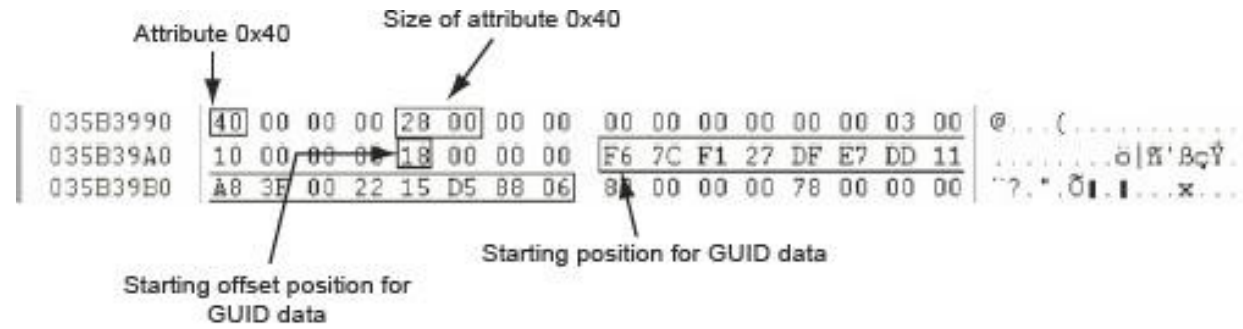

**Figure 5-16** Attribute 0x40: Object\_ID  
 Courtesy of X-Ways AG, [www.x-ways.net](http://www.x-ways.net)



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai


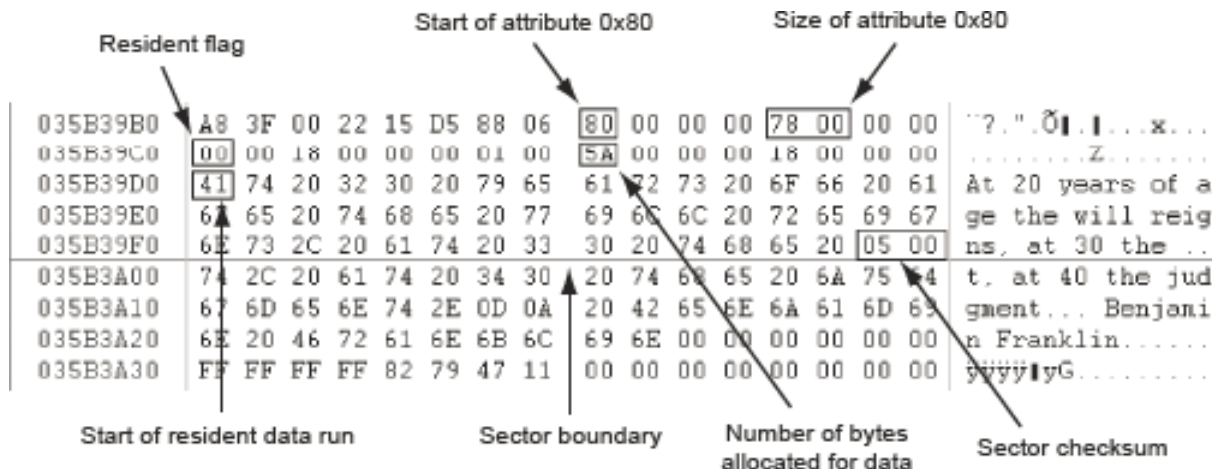


Figure 5-17 Attribute 0x80: Data for a resident file  
Courtesy of X-Ways AG, www.x-ways.net



- A : Start of attribute 0x80
- B : Size of attribute 0x80
- C : Nonresident flag
- D : First data run
- E : Second data run
- F : Additional data runs
- G : End of data run
- H : End of MFT record
- I : Sector checksum
- J : Sector boundary

Figure 5-18 Attribute 0x80: Data for a nonresident file  
Courtesy of X-Ways AG, www.x-ways.net

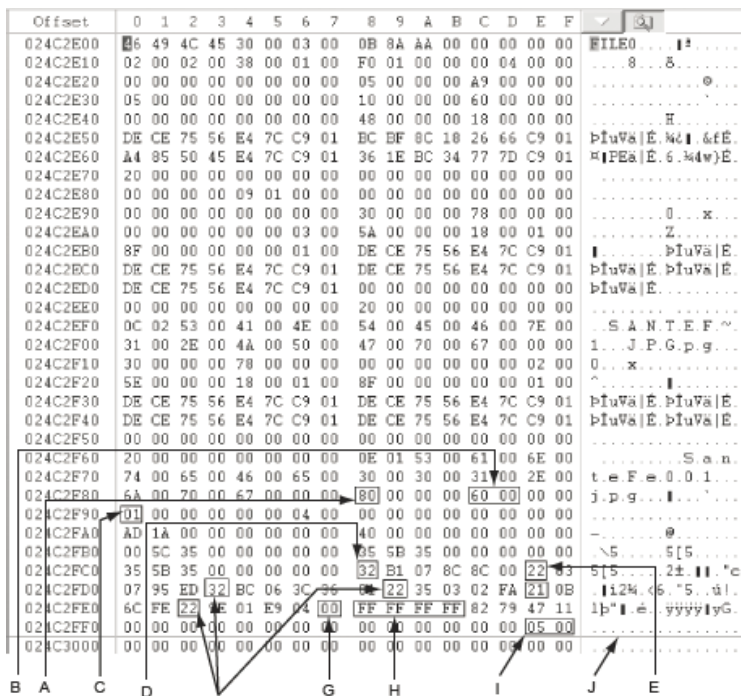

# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

## NTFS Alternate Data Streams

- **Alternate data streams**
  - Ways data can be appended to existing files
  - Can obscure valuable evidentiary data, intentionally or by coincidence
- In NTFS, an alternate data stream becomes an additional file attribute
  - Allows the file to be associated with different applications
- You can only tell whether a file has a data stream attached by examining that file's MFT entry

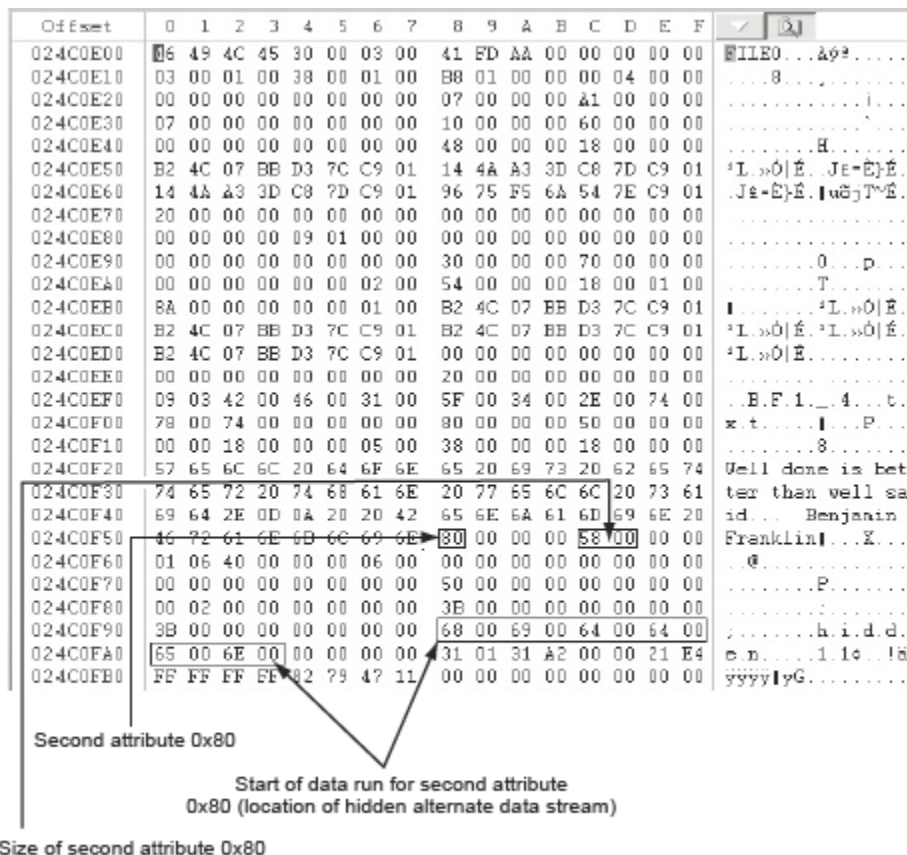


Figure 5-24 A text alternate data stream  
Courtesy of X-Ways AG, www.x-ways.net

## NTFS Compressed Files

- NTFS provides compression similar to FAT DriveSpace 3 (a Windows 98 compression utility)
- Under NTFS, files, folders, or entire volumes can be compressed
- Most computer forensics tools can uncompress and analyze compressed



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

Windows data

## NTFS Encrypting File System (EFS)

- **Encrypting File System (EFS)**
  - Introduced with Windows 2000
  - Implements a **public key** and **private key** method of encrypting files, folders, or disk volumes
- When EFS is used in Windows 2000 and later
  - A **recovery certificate** is generated and sent to the local Windows administrator account
- Users can apply EFS to files stored on their local workstations or a remote server

## EFS Recovery Key Agent

- Recovery Key Agent implements the recovery certificate
  - Which is in the Windows administrator account
- Windows administrators can recover a key in two ways: through Windows or from an MS-DOS command prompt
- MS-DOS commands
  - cipher
  - copy
  - efsrecvr (used to decrypt EFS files)

## Deleting NTFS Files

- When a file is deleted in Windows NT and later
  - The OS renames it and moves it to the Recycle Bin
- Can use the Del (delete) MS-DOS command
  - Eliminates the file from the MFT listing in the same way FAT does

## Resilient File System

- Resilient File System (ReFS) - designed to address very large data storage needs
  - Such as the cloud
- Features incorporated into ReFS's design:
  - Maximized data availability
  - Improved data integrity
  - Designed for scalability





# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- ReFS uses disk structures similar to the MFT in NTFS

## 2.4 List some options for decrypting drives encrypted with whole disk encryption.

### Understanding Whole Disk Encryption

- In recent years, there has been more concern about loss of
  - **Personal identity information (PII)** and trade secrets caused by computer theft
- Of particular concern is the theft of laptop computers and other handheld devices
- To help prevent loss of information, software vendors now provide whole disk encryption
- Current whole disk encryption tools offer the following features:
  - Preboot authentication
  - Full or partial disk encryption with secure hibernation
  - Advanced encryption algorithms
  - Key management function
- Whole disk encryption tools encrypt each sector of a drive separately
- Many of these tools encrypt the drive's boot sector
  - To prevent any efforts to bypass the secured drive's partition
- To examine an encrypted drive, decrypt it first
  - Run a vendor-specific program to decrypt the drive
  - Many vendors use a bootable CD or USB drive that prompts for a **one-time passphrase**

### Examining Microsoft BitLocker

- Available Vista Enterprise/Ultimate, Windows 7 and 8 Professional/Enterprise, and Server 08 and 12
- Hardware and software requirements
  - A computer capable of running Windows Vista or later
  - The TPM microchip, version 1.2 or newer
  - A computer BIOS compliant with Trusted Computing Group (TCG)
  - Two NTFS partitions



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- The BIOS configured so that the hard drive boots first before checking other bootable peripherals

## Examining Third-Party Disk Encryption Tools

- Some available third-party WDE utilities:
  - **PGP Full Disk Encryption**
  - **Voltage SecureFile**
  - **Utimaco SafeGuard Easy**
  - **Jetico BestCrypt Volume Encryption**
  - **TrueCrypt**

## 2.5 Explain how the Windows Registry works

- Registry
  - A database that stores hardware and software configuration information, network connections, user preferences, and setup information
- To view the Registry, you can use:
  - Regedit (Registry Editor) program for Windows 9x systems
  - Regedt32 for Windows 2000, XP, and Vista
  - Both utilities can be used for Windows 7 and 8

## Exploring the Organization of the Windows Registry

- **Registry terminology:**
  - Registry
  - Registry Editor
  - HKEY
  - Key
  - Subkey
  - Branch
  - Value
  - Default value
  - Hives

## 2.6 Describe Microsoft startup tasks.

### Understanding Microsoft Startup Tasks

- Learn what files are accessed when Windows starts
- This information helps you determine when a suspect's computer was last



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

accessed

- Important with computers that might have been used after an incident was reported

## Startup in Windows 7 and Windows 8

- Windows 8 is a multiplatform OS
  - Can run on desktops, laptops, tablets, and smartphones
- The boot process uses a boot configuration data (BCD) store
- The BCD contains the boot loader that initiates the system's bootstrap process
  - Press F8 or F12 when the system starts to access the Advanced Boot Options

## Startup in Windows NT and Later

- All NTFS computers perform the following steps when the computer is turned on:
  - Power-on self test (POST)
  - Initial startup
  - Boot loader
  - Hardware detection and configuration
  - Kernel loading
  - User logon
- Startup Files for Windows Vista:
  - The Ntldr program in Windows XP used to load the OS has been replaced with these three boot utilities:
    - Bootmgr.exe
    - Winload.exe
    - Winresume.exe
  - Windows Vista includes the BCD editor for modifying boot options and updating the BCD registry file
  - The BCD store replaces the Windows XP boot.ini file
- Startup Files for Windows XP:
  - NT Loader (NTLDR)
  - Boot.ini
  - Ntoskrnl.exe



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Bootvid.dll
- Hal.dll
- BootSect.dos
- NTDetect.com
- NTBootdd.sys
- Pagefile.sys

## • Windows XP System Files

**Table 5-8 Windows XP system files**

Filename	Description
Ntoskrnl.exe	The XP executable and kernel
Ntkrnlpa.exe	The physical address support program for accessing more than 4 GB of physical RAM
Hal.dll	The Hardware Abstraction Layer (described earlier)
Win32k.sys	The kernel-mode portion of the Win32 subsystem
Ntdll.dll	System service dispatch stubs to executable functions and internal support functions
Kernel32.dll	Core Win32 subsystem DLL file
Advapi32.dll	Core Win32 subsystem DLL file
User32.dll	Core Win32 subsystem DLL file
Gdi32.dll	Core Win32 subsystem DLL file

© 2015 Cengage Learning®

- Contamination Concerns with Windows XP
  - When you start a Windows XP NTFS workstation, several files are accessed immediately
    - The last access date and time stamp for the files change to the current date and time
  - Destroys any potential evidence
    - That shows when a Windows XP workstation was last used

## 2.7 Describe MS-DOS startup tasks

- ✓ MS-DOS uses three files when starting, with the same names as in Windows 9x/Me: Io.sys, Msdos.sys, and Command.com.
- ✓ Two other files are then used to configure MS-DOS at startup: Config.sys and Autoexec.bat.



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- ✓ Although MS-DOS and Windows 9x use some of the same startup filenames, there are some important differences between the files in these OSs.
- Io.sys is the first file loaded after the ROM bootstrap loader finds the disk drive. Io.sys then resides in RAM and provides the basic input and output service for all MS-DOS functions.
- Msdos.sys is the second program to load into RAM immediately after Io.sys.
- As mentioned, this file is the actual OS kernel, not a text file as in Windows 9x and Me.
- After Msdos.sys finishes setting up DOS services, it looks for the Config.sys file to configure device drivers and other settings.
- Config.sys is a text file containing commands that typically run only at system startup to enhance the computer's DOS configuration.
- Msdos.sys then loads Command.com, which contains the same internal DOS commands in MS-DOS 6.22 as in Windows 9x. As the loading of Command.com nears completion, Msdos.sys looks for and loads Autoexec.bat, a batch file containing customized settings for MS-DOS that runs automatically.
- In this batch file, you can define the default path and set environmental variables, such as temporary directories. MS-DOS then accesses and resets the last access dates and times on files when powered up.

## 2.8 Describe about virtual machine.

- **Virtual machine**
  - Allows you to create a representation of another computer on an existing physical computer
- A virtual machine is just a few files on your hard drive
  - Must allocate space to it
- A virtual machine recognizes components of the physical machine it's loaded on




# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

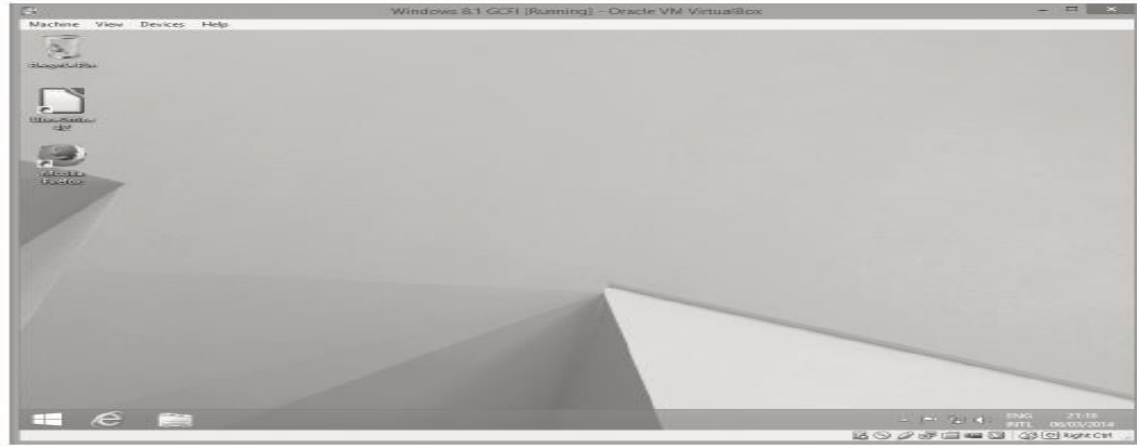

**Figure 5-31** A virtual machine running on the host computer's desktop  
Source: Oracle VirtualBox

- Virtual OS is limited by the physical machine's OS
  - In digital forensics
    - Virtual machines make it possible to restore a suspect drive on your virtual machine
      - And run nonstandard software the suspect might have loaded
  - From a network forensics standpoint, you need to be aware of some potential issues, such as:
    - A virtual machine used to attack another system or network

## Creating a Virtual Machine

- Popular applications for creating virtual machines
  - VMware Server, VMware Player and VMware Workstation, Oracle VM VirtualBox, Microsoft Virtual PC, and Hyper-V
- Using VirtualBox
  - An open-source program that can be downloaded at [www.virtualbox.org/wiki/Downloads](http://www.virtualbox.org/wiki/Downloads)
- Consult with your instructor before doing the activities using VirtualBox

## 3. Explain in detail about the Software/ Hardware Tools in Current Computer Forensics Tools.

- Explain how to evaluate needs for digital forensics tools
- Describe available digital forensics software tools
- List some considerations for digital forensics hardware tools
- Describe methods for validating and testing forensics tools



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION



Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

## 3.1 Explain how to evaluate needs for digital forensics tools.

### Evaluating Digital Forensics Tool Needs

- Consider open-source tools; the best value for as many features as possible
- Questions to ask when evaluating tools:
  - On which OS does the forensics tool run
  - What file systems can the tool analyze?
  - Can a scripting language be used with the tool to automate repetitive functions?
  - Does it have automated features?
  - What is the vendor's reputation for providing support?

### Types of Digital Forensics Tools

- Hardware forensic tools
  - Range from single-purpose components to complete computer systems and servers
- Software forensic tools
  - Types
    - Command-line applications
    - GUI applications
  - Commonly used to copy data from a suspect's disk drive to an image file

### Tasks Performed by Digital Forensics Tools

- Follow guidelines set up by NIST's Computer Forensics Tool Testing (CFTT) program
- ISO standard 27037 states: Digital Evidence First Responders (DEFs) should use validated tools
- Five major categories:
  - Acquisition
  - Validation and verification
  - Extraction
  - Reconstruction
  - Reporting

### Acquisition

- Making a copy of the original drive



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION



Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Acquisition subfunctions:
  - Physical data copy
  - Logical data copy
  - Data acquisition format
  - Command-line acquisition
  - GUI acquisition
  - Remote, live, and memory acquisitions
  - Two types of data-copying methods are used in software acquisitions:
    - Physical copying of the entire drive
    - Logical copying of a disk partition
  - The formats for disk acquisitions vary
    - From raw data to vendor-specific proprietary

You can view the contents of a raw image file with any hexadecimal editor

- Creating smaller segmented files is a typical feature in vendor acquisition tools
- Remote acquisition of files is common in larger organizations
  - Popular tools, such as AccessData and EnCase, can do remote acquisitions of forensics drive images on a network

## Validation and Verification

- **Validation**
  - A way to confirm that a tool is functioning as intended
- **Verification**
  - Proves that two sets of data are identical by calculating hash values or using another similar method
  - A related process is filtering, which involves sorting and searching through investigation findings to separate good data and suspicious data.
- **Subfunctions**
  - Hashing
    - CRC-32, MD5, SHA-1 (Secure Hash Algorithms)
  - Filtering
    - Based on hash value sets





# SNS COLLEGE OF ENGINEERING




AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Analyzing file headers
  - Discriminate files based on their types
- National Software Reference Library (NSRL) has compiled a list of known file hashes
  - For a variety of OSs, applications, and images
- **Validation and discrimination**
  - Many computer forensics programs include a list of common header values
    - With this information, you can see whether a file extension is incorrect for the file type
  - Most forensics tools can identify header values

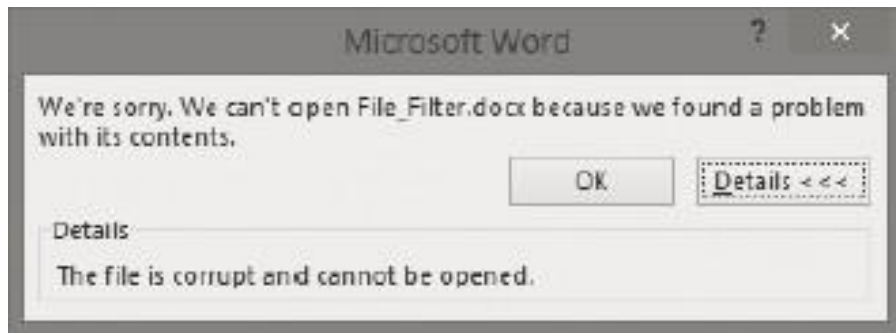

**Figure 6-4** Error message displayed when trying to open a .jpeg file in Word



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- **Extraction**

- Recovery task in a digital investigation
- Most challenging of all tasks to master
- Recovering data is the first step in analyzing an investigation's data
- **Subfunctions of extraction**
  - Data viewing
  - Keyword searching
  - Decompressing or uncompressing
  - Carving
  - Decrypting
  - Bookmarking or tagging
- **Keyword search** speeds up analysis for investigators
- From an investigation perspective, encrypted files and systems are a problem
- Many password recovery tools have a feature for generating potential password lists
  - For a **password dictionary attack**
- If a password dictionary attack fails, you can run a **brute-force attack**

- **Reconstruction**

- Re-create a suspect drive to show what happened during a crime or an incident
- Methods of reconstruction
  - Disk-to-disk copy
  - Partition-to-partition copy
  - Image-to-disk copy
  - Image-to-partition copy
  - Rebuilding files from data runs and carving
- To re-create an image of a suspect drive
  - Copy an image to another location, such as a partition, a physical disk, or a virtual machine
  - Simplest method is to use a tool that makes a direct disk-to-image



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION



Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

copy

- Examples of disk-to-image copy tools:
  - Linux dd command
  - ProDiscover
  - Voom Technologies Shadow Drive
- **Reporting**
  - To perform a forensics disk analysis and examination, you need to create a report
  - Subfunctions of reporting
    - Bookmarking or tagging
    - Log reports
    - Report generator
  - Use this information when producing a final report for your investigation

**Table 6-1 Comparison of forensics tool functions**

Function	ProDiscover Basic	OSForensics, demo version	AccessData FTK	Guidance Software EnCase
<b>Acquisition</b>				
Physical data copy	✓	✓	✓	✓
Logical data copy	✓	✓	✓	
Data acquisition formats	✓	✓	✓	✓
Command-line processes				✓
GUI processes	✓	✓	✓	✓
Remote acquisition		✓	✓	✓
<b>Validation and verification</b>				
Hashing	✓	✓	✓	✓
Verification	✓	✓	✓	✓
Filtering		✓	✓	✓
Analyzing file headers		✓	✓	✓
<b>Disk-to-disk copy</b>				
Disk-to-disk copy	✓	✓	✓	✓
Partition-to-partition copy	✓	✓	✓	✓
Image-to-disk copy	✓	✓	✓	✓
Image-to-partition copy	✓	✓	✓	✓
Disk-to-image copy	✓	✓	✓	✓
Rebuilding files	✓	✓	✓	✓
<b>Reporting</b>				
Bookmarking/tagging	✓	✓	✓	✓
Log reports		✓	✓	✓
Report generator	✓	✓	✓	
<b>Automation and other features</b>				
Scripting language				✓
Mount virtual machines		✓	✓	✓
E-discovery		✓	✓	✓



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

## Other Considerations for Tools

- **Considerations**
  - **Flexibility**
  - **Reliability**
  - **Future expandability**
- **Create a software library containing older versions of forensics utilities, OSs, and other programs**

## 3.2 Describe available digital forensics software tools.

### Digital Forensics Software Tools

- The following sections explore some options for command-line and GUI tools in both Windows and UNIX/Linux

### Command-line Forensics Tools

- The first tools that analyzed and extracted data from floppy disks and hard disks were MS-DOS tools for IBM PC file systems
- Norton DiskEdit
  - One of the first MS-DOS tools used for computer investigations
  - Command-line tools require few system resources
    - Designed to run in minimal configurations
  - Current programs are more powerful and have many more capabilities

### Linux Forensics Tools

- **UNIX** has been mostly replaced by Linux
  - You might still encounter systems running UNIX
- **Linux** platforms are becoming more popular with home and business end users
- **SMART**
  - Designed to be installed on numerous Linux versions
  - Can analyze a variety of file systems with SMART
  - Many plug-in utilities are included with SMART
  - Another useful option in SMART is its hex viewer
- **Helix 3**
  - One of the easiest suites to begin with
  - You can load it on a live Windows system



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Loads as a bootable Linux OS from a cold boot
- \*\*Some international courts have not accepted live acquisitions as a valid forensics practice
- **Kali Linux**
  - Formerly known as BackTrack
  - Includes a variety of tools and has an easy-to-use KDE interface
- **Autopsy and SleuthKit**
  - Sleuth Kit is a Linux forensics tool
  - Autopsy is the GUI browser interface used to access Sleuth Kit's tools

## Other GUI Forensics Tools

- GUI forensics tools can simplify digital forensics investigations
- Have also simplified training for beginning examiners
- Most of them are put together as suites of tools
- **Advantages**
  - Ease of use
  - Multitasking
  - No need for learning older OSs
- **Disadvantages**
  - Excessive resource requirements
  - Produce inconsistent results
  - Create tool dependencies
    - Investigators' may want to use only one tool
    - Should be familiar with more than one type of tool

## 3.3 List some considerations for digital forensics hardware tools

### Digital Forensics Hardware Tools

- Technology changes rapidly
- Hardware eventually fails
  - Schedule equipment replacements periodically
- When planning your budget consider:
  - Amount of time you expect the forensic workstation to be running
  - Failures



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Consultant and vendor fees
- Anticipate equipment replacement

## Forensic Workstations

- Carefully consider what you need
- Categories
  - Stationary workstation
  - Portable workstation
  - Lightweight workstation
- Balance what you need and what your system can handle
  - Remember that RAM and storage need updating as technology advances
- Police agency labs
  - Need many options
  - Use several PC configurations
- Keep a hardware library in addition to your software library
- Private corporation labs
  - Handle only system types used in the organization
- Some vendors offer workstations designed for digital forensics
- Examples
  - F.R.E.D. unit from Digital Intelligence
  - Hardware mounts from ForensicPC
- Having vendor support can save you time and frustration when you have problems
- Can mix and match components to get the capabilities you need for your forensic workstation

## Using a Write-Blocker

- **Write-blocker**
  - Prevents data writes to a hard disk
- **Software-enabled blockers**
  - Typically run in a shell mode (Windows CLI)
  - Example: PDBlock from Digital Intelligence
- **Hardware options**
  - Ideal for GUI forensic tools



# SNS COLLEGE OF ENGINEERING



## AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Act as a bridge between the suspect drive and the forensic workstation
- You can navigate to the blocked drive with any application
- Discards the written data
  - For the OS the data copy is successful
- Connecting technologies
  - FireWire
  - USB 2.0 and 3.0
  - SATA, PATA, and SCSI controllers

### Recommendations for a Forensic Workstation

- Determine where data acquisitions will take place
- With Firewire and USB write-blocking devices
  - You can acquire data easily with Digital Intelligence FireChief and a laptop computer
  - FireWire
- If you want to reduce hardware to carry:
  - WiebeTech Forensic DriveDock with its regular DriveDock FireWire bridge or the Logicube Talon
- Recommendations when choosing stationary or lightweight workstation:
  - Full tower to allow for expansion devices
  - As much memory and processor power as budget allows
  - Different sizes of hard drives
  - 400-watt or better power supply with battery backup
  - External FireWire and USB 2.0 ports
  - Assortment of drive adapter bridges
  - Ergonomic keyboard and mouse
  - A good video card with at least a 17-inch monitor
  - High-end video card and dual monitors
- If you have a limited budget, one option for outfitting your lab is to use high-end game PCs

### 3.4 Describe methods for validating and testing computer forensics tools

#### Validating and Testing Forensic Software

- It is important to make sure the evidence you recover and analyze can be



# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai  
admitted in court

- You must test and validate your software to prevent damaging the evidence

## Using National Institute of Standards and Technology Tools

- NIST publishes articles, provides tools, and creates procedures for testing/validating forensics software
- Computer Forensics Tool Testing (CFTT) project
  - Manages research on computer forensics tools
- NIST has created criteria for testing computer forensics tools based on:
  - Standard testing methods
  - ISO 17025 criteria for testing items that have no current standards
- Your lab must meet the following criteria
  - Establish categories for digital forensics tools
  - Identify forensics category requirements
  - Develop test assertions
  - Identify test cases
  - Establish a test method
  - Report test results
- ISO 5725 - specifies results must be repeatable and reproducible
- NIST created the National Software Reference Library (NSRL) project
  - Collects all known hash values for commercial software applications and OS files
    - Uses SHA-1 to generate a known set of digital signatures called the Reference Data Set (RDS)
  - Helps filtering known information
  - Can use RDS to locate and identify known bad files

## Using Validation Protocols

- Always verify your results by performing the same tasks with other similar forensics tools
- Use at least two tools
  - Retrieving and examination
  - Verification
- Understand how forensics tools work
- One way to compare results and verify a new tool is by using a disk editor
  - Such as Hex Workshop or WinHex
- Disk editors do not have a flashy interface, however they:
  - Are reliable tools
  - Can access raw data
- Computer Forensics Examination Protocol





# SNS COLLEGE OF ENGINEERING



AN AUTONOMOUS INSTITUTION

Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

- Perform the investigation with a GUI tool
- Verify your results with a disk editor
- Compare hash values obtained with both tools
- Digital Forensics Tool Upgrade Protocol
  - Test
    - New releases
    - OS patches and upgrades
  - If you find a problem, report it to forensics tool vendor
    - Do not use the forensics tool until the problem has been fixed
  - Use a test hard disk for validation purposes
  - Check the Web for new editions, updates, patches, and validation tests for your tools.

## **Important Question**

### **Part-A**

1. Write the rule for the rules for controlling digital evidence.
2. Define Best evidence rule states:
3. Define Federal Rules of Evidence
4. How to collect evidence at private-sector incident scenes.
5. Define Processing Law Enforcement Crime Scenes
6. How to prepare for a search in criminal case.
7. Determining Whether You Can Seize Computers and Digital Devices in processing crime.
8. How are the tools are used in processing crime and incident scene.
9. How to prepare for a Preparing the Investigation Team
10. List out the Storing Digital Evidence.
11. How to Reviewing a Case.
12. Define file system.
13. List out the disk drive components.
14. Define Solid-State Storage Devices.
15. Define NTFS Encrypting File System (EFS)
16. Define NTFS Disks
17. Define Deleting NTFS Files
18. List out the Third-Party Disk Encryption Tools.
19. Explain how the Windows Registry works
20. List out the registry terminology.

### **Part-B**

1. Explain the rules for controlling digital evidence
2. Describe how to collect evidence at private-sector incident scenes
3. Explain guidelines for processing law enforcement crime scenes



# SNS COLLEGE OF ENGINEERING

AN AUTONOMOUS INSTITUTION



Accredited by NAAC – UGC with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

4. List the steps in preparing for an evidence search
5. Describe how to secure a computer incident or crime scene
6. Describe Microsoft file structures
7. Explain the structure of New Technology File System (NTFS) disks
8. List some options for decrypting drives encrypted with whole disk encryption
9. Explain how the Windows Registry works
10. Describe Microsoft startup tasks
11. Describe MS-DOS startup tasks
12. Describe available computer forensics software tools
13. List some considerations for computer forensics hardware tools
14. Describe methods for validating and testing computer forensics tools